


Products in Family


DRH165G7R/4GB (1 x 4GB 1Rx4 DIMM)
DRH165G7R/8GB (1 x 8GB 2Rx4 DIMM)
DRH165G7R/16GB (1 x 16GB 4Rx4 DIMM)

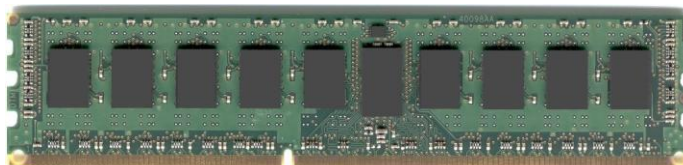

Features	Description
<p>240-pin JEDEC-compliant DIMMs 133.35 mm wide by 30 mm high (1.181" x 5.25") Data Transfer Rate: 10.6 Gigabytes/sec * Operating Voltage: 1.5 V \pm0.075 Fully RoHS Compliant Thermal Sensor</p> <p>* The DRH165G7R/16GB has a data transfer rate of 8.53 Gigabytes/sec</p>	<p>Each DRH165G7R upgrades consists of a single DDR3-1333 Registered ECC DIMM that conforms to JEDEC's DDR3, PC3-10600 standard*. One 2K-bit EEPROM is used for Serial Presence Detect and a combination register/PLL with Address and Command Parity is also used. A thermal sensor accurately monitors the DIMM module and can prevent exceeding the maximum operating temperature of 95C.</p> <p>* The DRH165G7R/16GB is a DDR3-1066, PC3-8500 DIMM</p>

Dataram Product	HP Product	Supported in these HP systems:
<p>DRH165G7R/4GB DRH165G7R/8GB DRH165G7R/16GB</p>	<p>593911-B21 593913-B21 593915-B21</p>	<p>HP ProLiant BL465c G7, BL685c G7, DL165 G7, DL385 G7, DL585 G7, SL165z G7</p> <p><i>Note: Not all products supported in all systems. See HP or Dataram websites for specific memory options for your model.</i></p>


Front view

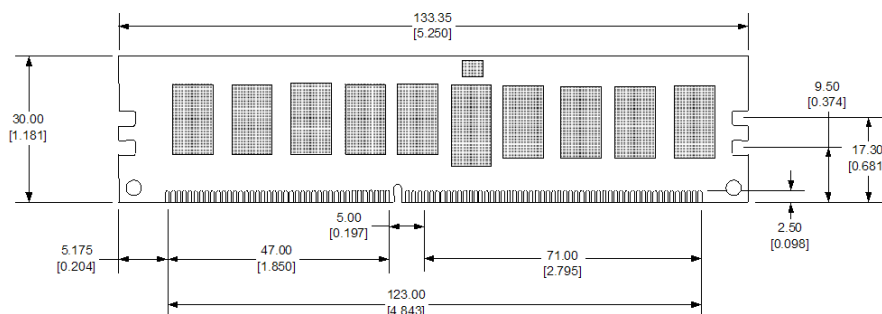

Notes

Tolerances on all dimensions except where otherwise indicated are $\pm .13$ (.005).
All dimensions are expressed in millimeters [inches]

Back view

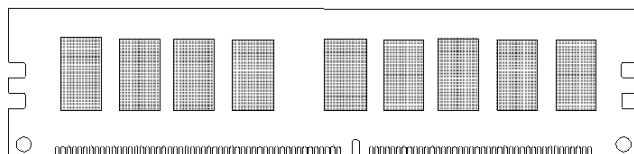

Side view

