


## Products in Family

DRIX2133R/8GB (1 x 8GB RDIMM)  
 DRIX2133RS/8GB (1 x 8GB RDIMM)  
 DRIX2133R/16GB (1 x 16GB RDIMM)  
 DRIX2133R/32GB (1 x 32GB RDIMM)  
 DRIX2133LRQ/32GB (1 x 32GB LRDIMM)  
 DRIX2133LRQ/64GB (1 x 64GB LRDIMM)



Features	Description
288-pin JEDEC-compliant DIMMs 133.35 mm wide by 31.25 mm high (5.25" x 1.23") Data Transfer Rate: 17 Gigabytes/sec Operating Voltage: 1.2V (1.14V~1.26V) Fully RoHS Compliant Thermal Sensor	The DRIX2133R upgrades are registered memory modules, which conforms to JEDEC's DDR4, PC4-2133P standard. The DRIX2133LRQ is a load-reduced memory module (LRDIMM). One 4K-bit EEPROM is used for Serial Presence Detect and a combination register/PLL, with Address and Command Parity is also used.

Dataram Product	IBM Product	Product Description
DRIX2133R/8GB	46W0792	1 x 8GB 2Rx8 PC4-2133P-R-15
DRIX2133RS/8GB	46W0788	1 x 8GB 1Rx4 PC4-2133P-R-15
DRIX2133R/16GB	46W0796, 95Y4821	1 x 16GB 2Rx4 PC4-2133P-R-15
DRIX2133R/32GB	95Y4808	1 x 32GB 2Rx4 PC4-2133P-R-15
DRIX2133LRQ/32GB	46W0800	1 x 32GB 4Rx4 PC4-2133P-L-15
DRIX2133LRQ/64GB	95Y4812	1 x 64GB 4Rx4 PC4-2133P-L-15

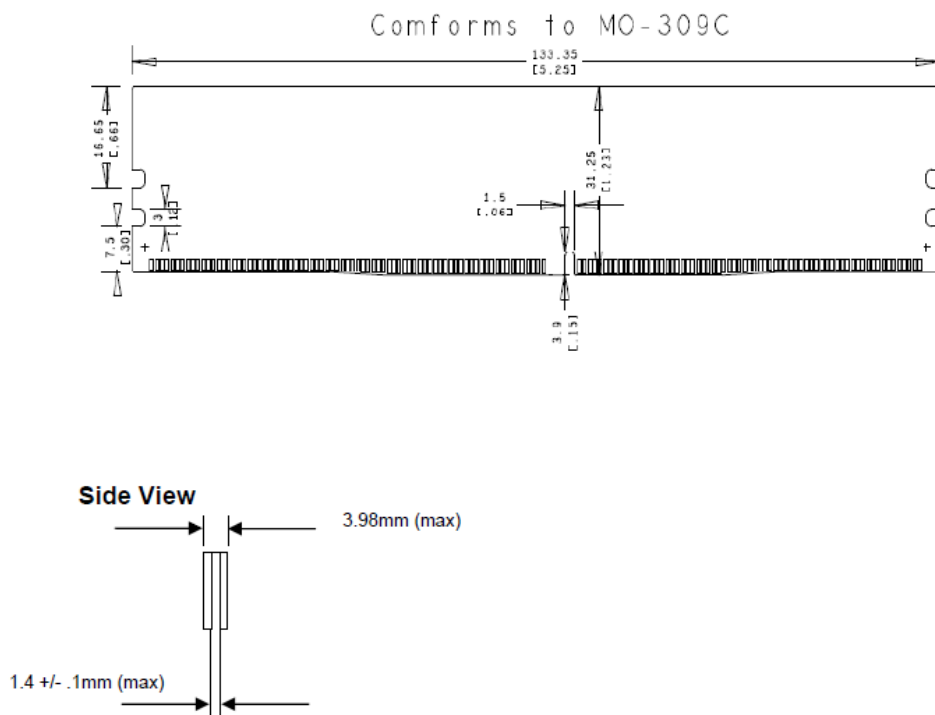

## Notes:

- Tolerances on all dimensions except where otherwise indicated are  $\pm .13$ . Reference JEDEC standard MO-309C.
- All dimensions are expressed: millimeters [inches]

