


DDR4-2400, PC4-2400T, ECC, 1.2V, 288-pin DIMMs


Products in Family

DRSODAX6/256GB (8 x 32GB RDIMM) DRSODAX6/512GB (8 x 64GB LRDIMM)



Features	Description
288-pin JEDEC-compliant DIMMs	The DRSODAX6 upgrades are registered memory
133.35 mm wide by 31.25 mm high (5.25" x 1.23")	modules, which conform to JEDEC's DDR4, PC4-2400T
Data Transfer Rate: 19.2 Gigabytes/sec	standard. The DRSODAX6/512GB are load-reduced
Operating Voltage: 1.2V (1.14V~1.26V)	memory modules (LRDIMMs). One EEPROM is used for
Fully RoHS Compliant	Serial Presence Detect and a combination register/PLL,
Thermal Sensor	with Address and Command Parity is also used.

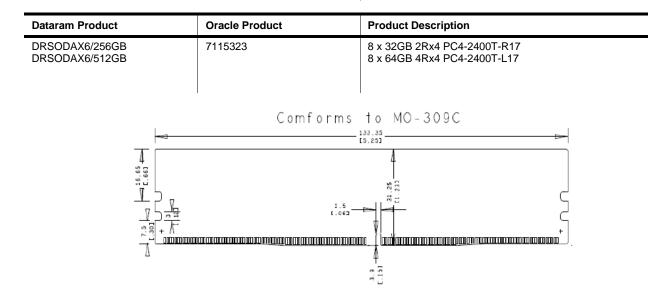



Notes:

Tolerances on all dimensions except where otherwise indicated are ±.13. Reference JEDEC 1. standard MO-309C.

2. All dimensions are expressed: millimeters [inches]

DRSODAX6